


ENVIRONMENTAL PRODUCT DECLARATION

HUALI FLOORING PRODUCTS: STONE PLASTIC COMPOSITE (SPC)

TAIZHOU HUALI NEW MATERIALS CO., LTD.

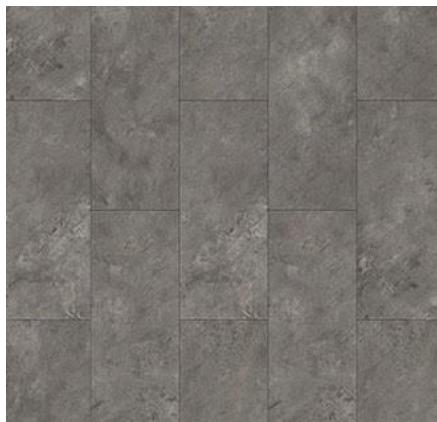

HUALI
STONE PLASTIC COMPOSITE(SPC)



Taizhou Huali New Materials Co.,Ltd. was established on 15th April, 2002. Up to year 2020, the company owns two production bases which covers an area of 250,000m² including 200,000 m² building area. The total investment reaches 100 million US Dollars. The current monthly production capacity is about 1500 containers. The sales of year 2020 reaches US\$360 Million. There are more than 2000 employees in the company including 20 engineers and 60 QC. The company has been awarded with the certificate of U-mark, DIBt, CE, Floorscore, Greenguard, ISO9001, ISO14001 and etc. Huali manufactures a variety of high-quality floor covering products, including luxury vinyl tiles, stone plastic composite, and wood plastic composite flooring. Sustainability is a core value of Huali, which guides the innovation and development of Huali's floor product and business.

For more information visit:
www.hualifloors.com



ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)



According to ISO 14025,
EN 15804 and ISO 21930:2017

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Environment 333 Pfingsten Road Northbrook, IL60611 https://www.ul.com/ https://spot.ul.com
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions v.2.5 March 2020
MANUFACTURER NAME AND ADDRESS	Taizhou Huali New Materials Co.,Ltd. Zhangdian Industrial Zone, Jiangyan City, Jiangsu Province, P.R.China
DECLARATION NUMBER	4789686856.102.1
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	Huali Stone Plastic Composite (SPC); 1 m ²
REFERENCE PCR AND VERSION NUMBER	Product Category Rules for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements, Standard 10010, Version 3.2 Part B: Flooring EPD Requirements, UL 10010-7, Version 2.0
DESCRIPTION OF PRODUCT APPLICATION/USE	Commercial and institutional applications
PRODUCT RSL DESCRIPTION	Commercial: 10 Years Residential: 15 Years
MARKETS OF APPLICABILITY	Europe, North America, Global
DATE OF ISSUE	2020-October-01
DATE OF EXPIRATION	2026-April-01
EPD TYPE	Product-Specific
RANGE OF DATASET VARIABILITY	N/A
EPD SCOPE	Cradle to grave
YEAR(S) OF REPORTED PRIMARY DATA	Jan 2019 – Dec 2019
LCA SOFTWARE & VERSION NUMBER	SimaPro 9
LCI DATABASE(S) & VERSION NUMBER	Ecoinvent 3, Ecoinvent 3- CN, USLCI, ELCD
LCIA METHODOLOGY & VERSION NUMBER	CML-IA (baseline) & TRACI

This PCR review was conducted by:	UL Environment
	PCR Review Panel
	epd@ulenvironment.com
This declaration was independently verified in accordance with ISO 14025: 2006. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	Cooper McCollum, UL Solutions <i>Cooper McC</i>
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	Jim Mellentine, Thrive ESG <i>James A. Mellentine</i>

LIMITATIONS

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible". Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

1. Product Definition and Information

1.1 Description of Company/Organization

Taizhou Huali New Materials Co.,Ltd. was established on 15th April, 2002. Up to year 2020, the company owns two production bases which covers an area of 250,000m² including 200,000 m² building area. The total investment reaches 100 million US Dollars. The current monthly production capacity is about 1500 containers. The sales of year 2020 reaches US\$360 Million. There are more than 2000 employees in the company including 20 engineers, 60 QC. The company has been awarded with the certificate of U-mark, DIBt, CE, Floorscore, Greenguard, ISO9001, ISO14001 and etc..

The product range includes Glue down LVT, Loose lay LVT, Click LVT & WPC with Valinge click system of 2G, 2G-FD & 5G-C. The products are exported to all over the world. 90% of the products are exported to North America and Europe.

1.2 Product Description

1.2.1 Product Identification

This Environmental Product Declaration (EPD) covers three type of Huali flooring products, i.e., SPC with three kinds of underlay: cork, IXPE and EVA.

1.2.2 Product Specification

Stone plastic composite (SPC) flooring is a rigid plastic floor, which can also be bent, but compared with LVT floor, the degree of curvature is much less. The following figure shows the structure of SPC product, from bottom up, the tile is composed of several layers, i.e. the SPC vinyl layer, the vinyl decor film, the vinyl wear layer and the UV coating layer.

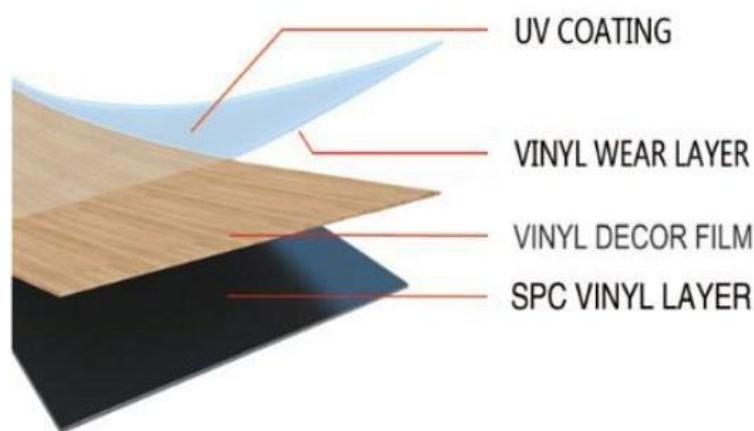


Figure 1. Construction of SPC flooring

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

Table 1. Technical Specifications of SPC flooring

Name	Standard	Value
Dimensional Stability (6h - 80°C)	ISO23999/ASTM F2199	≤0.1 %
Curl (6h - 80°C)	ISO23999/ASTM F2199	±2.0 mm
Color Fastness	ISO 105 B02/ASTM F1515	≥ 6/ΔE ≤ 8
Abrasion Resistance	EN660-2	Pass
Wear Layer Abrasion Resistance	EN 13329 (S-42, 200 cycle change)	IP≥4000cycles(0.55mm wear layer), IP≥1800cycles(0.30mm wear layer)
Castor Resistance	ISO4918	No visible damage after 25000 revolutions
Opening Between Elements	ISO10582/EN13329	Average ≤ 0.10 mm, Individual values ≤ 0.15 mm
Height Difference	ISO10582/EN13329	Average ≤ 0.10 mm, Individual values ≤ 0.15 mm
Gloss Retention	EN 16094A	Rating 1
Micro-scratch Resistance	EN 16094B	≥ Rating 2
Resistance to Chemicals	ISO26987/ASTM F925	Class 0 / Excellent
Sound Absorption	DIN 52210	<4dB
Impact Insulation Class	ASTM E492	IIC47
Sound Transmission Class	ASTM E90	STC50
Burning Behavior	EN 13501-1	Bfl – s1
Slip Resistance	EN 13893	DS
Static Coefficient of Friction	ASTM D2047	Dry: 0.37 / Wet 1 : 0.69
Thermal Conductivity	EN 12667	0.1167 W/(m · K)
Thermal Resistance	EN 12667	0.0364 (mm ² · K)/W
Residual Indentation	ISO24343-1 /ASTM F1914	≤ 0.10 mm/average less than 8 %, maximum single reading 10 %
Suitable for Underfloor Heating		YES 28 °C MAX
Toxicity	EN 71	Non Toxic
VOC Emission	AgBB/DIBt	Certified
Electrical Resistance	EN 1081	Horizontal: > 1.0 × 10 ⁸⁹ OHM Vertical: 5.1 × 10 ⁸² OHM
Formaldehyde emission	EN 717-1	E1
Antistatic Performance	EN 1815	PVC SOLE: + 3.5 KV
Phthalate	CPSC-CH-C1001-09.3	DBP, DEHP, BBP, DINP, DNOP, DIDP, DIBP, DnHP, DCHP≤0.1%
Heavy Metals	ASTM F963/CPSC-CH-E1002-08.3	Total Lead (Pb) ≤100PPm
		SOL. Lead (Pb) ≤90PPm
		SOL. Mercury (Hg) ≤60PPm
		SOL. Chromium (Cr) ≤60PPm
		SOL. Arsenic (As) ≤25PPm
		SOL. Antimony (Sb) ≤60PPm
		SOL. Barium (Ba) ≤1000PPm
		SOL. Selenium (Se) ≤500PPm
		SOL. Cadmium (Cd) ≤75PPm

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

1.2.3 Product-Specific EPD

This EPD is for Huali flooring products: SPC with three kinds of underlay: cork, IXPE and EVA. The thickness range of the SPC is from 3.0 to 9.5. The "SPC (5.5*0.5)" is the representative specifications studied in this report because they have the highest annual production quantity. (4.0*0.5) means the thickness of the product is 4.0 mm and the thickness of its wearing layer is 0.5 mm. In the Life-Cycle Assessment (LCA) study, each specification was analyzed, and the LCA results were presented separately. However, only the LCA results of the representative specification are presented in this declaration and the rest series of product's value can be applied using the scaling factor in table 27.

While allocating energy and materials within the production site, allocation was carried out based on either the average annual mass or average annual surface area produced.

1.3 Application

The products covered in this declaration are for use in corporate offices, retail spaces, residential spaces, hospitality, and a variety of other commercial environments.

1.4 Declaration of Methodological Framework

In this project, a full LCA approach was considered with some simplification on data modeling using generic data for most background systems. The EPD analysis uses a cradle-to-grave system boundary. No known flows are deliberately excluded from this EPD.

To calculate the LCA results for the product maintenance stage, a 10- or 15-year reference service life (RSL) was assumed for the declared products. Product with wearing layer over 0.5 (including 0.5) will be used for commercial purposes with a RSL of 10 years, and products with wearing layer below 0.5 will be considered for residential use with a RSL of 15 years.

Additional details on assumptions, cut-offs and allocation procedures can be found in section 2.4, 2.5, and 2.9, respectively.

1.5 Technical Requirements

The products offer a wide range of beautiful flooring options in various specifications for many applications. Therefore, the following technical data provides a range of values for each parameter.

Table 2. Technical Data for SPC(5.5*0.5)

Name		Average Value		Min Value	Max Value	Unit
PRODUCT THICKNESS		5.5		5.4	5.63	MM
WEAR LAYER THICKNESS (WHERE APPLICABLE)		0.5		0.5	0.5	MM
PRODUCT WEIGHT		10872		10674	11129	G/M ²
PRODUCT FORM	ROLLS	WIDTH	-	-	-	MM
	TILES	LENGTH	-	-	-	M
	PLANKS		-	150x936	228x1830	MM

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

1.6 Placing on the Market / Application Rules

Huali Flooring products have the technical specifications shown in Table 1. They also meet the criteria of the following certifications and standards:

- GREENGUARD
- FloorScore®
- DIBt
- CE
- U-mark

1.7 Material Composition

According to the estimate by Huali, almost all of the raw materials are from Chinese mainland. The type and ratio/weight of raw materials per product are listed in tables below.

Table 3. Material Composition of SPC(5.5*0.5)

Component	Materials	Total Weight of material in product [g/m ²]	Percent of Total Product Weight(%)
UV COATING	UV COATING	20	0.19
WEAR LAYER	PVC	483	4.52
	DOTP	144.9	1.36
	STABILIZER	12.1	0.11
FILM	PVC	10.1	0.09
SPC BOARD	PVC	2695	25.23
	STABILIZER	270	2.53
	CALCIUM CARBONATE	6737	63.07
	IMPACT MODIFIER	189	1.77
	LUBRICATING	49	0.46
	POLYETHYLENE WAX	49	0.46
	POLYETHYLENE WAX, OXIDIZED	11	0.10
	CARBON BLACK	11	0.10
TOTAL		10681	99.80

1.8 Manufacturing

The manufacturing process of LVT, SPC and WPC mainly includes backing layer preparation, laminating, UV coating, cutting, edge treatment and packaging, which involves raw materials, energy, water, emissions.

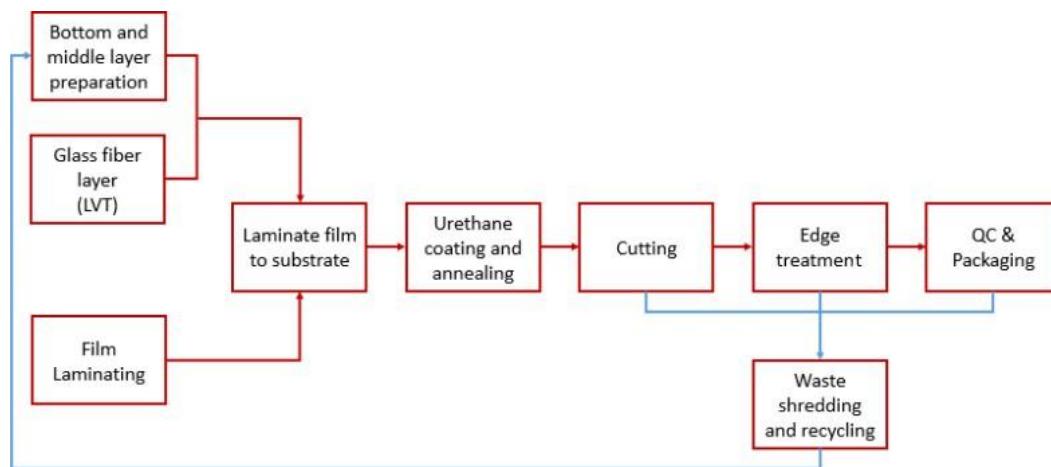


Figure 2. Production Process Flowchart of product

1.9 Packaging

Cardboard and wood pallets are the main packaging materials for Huali Flooring products. According to Huali, the target market of flooring products including USA, Europe, and other region mainly Asia, with the market ratio of 70%, 20% and 10% respectively. The disposal of packaging materials will adopt a rough country and region weighted average disposal mode following literature review. For packaging disposal in Asia and the rest market, the waste disposal scenario from China is set default, as the detailed market ratio information of the rest market is unavailable and China is assumed to be the main consumer. A sensitivity analysis on packaging disposal scenarios was also conducted.

1.10 Transportation

According to Huali, most of flooring products are consumed in North America, Europe and Asia. Oceanic and road transportation distance for product delivery is estimated with reference to external resources. Table 8 demonstrates the data used for stage A4 in the LCA modelling.

1.11 Product Installation

SPC can be installed over most solid subfloor with minimal subfloor preparation, and the installation is completely glue free, eliminating the need for using additional materials and chemicals with potential VOC issues.

Therefore, in this report the chosen representative specifications are all glue-free. The installation is a relatively simple task and only a few tools like cutting instruments (knife, scissors) are necessary for installation. In this LCA study we assume the floor is flat and the energy or material required to do floor preparation is omitted. As tools are reusable, the production and disposal stage of tools is also omitted. For the simplicity of the study, we assume that the scrap of the installation is treated following the normal end of life disposal scenarios used in the target market.

1.12 Use and Maintenance

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

Very little effort is required in order to use flooring products, hence in the usage stage the focus is to put on maintaining the floor tile in terms of protecting its integrity and functionality. In normal condition, routine vacuuming, cleaning and surface conditioning is required. The energy, water and detergent consumption data was based on estimation from Huali and study of comparative product's usage data.

1.13 Reference Service Life and Estimated Building Service Life

Product with wearing layer over 0.5 (including 0.5) will be used for commercial purposes with a RSL of 10 years, and products with wearing layer below 0.5 will be considered for residential use with a RSL of 15 years. The building estimated service life (ESL) is 75 years.

1.14 Disposal

According to Huali, most of flooring products are consumed in Europe, USA, Asia and other regions. The disposal of the used flooring products will adopt a country and region average disposal mode following literature review. End of life disposal treatment process (C4) from Ecoinvent and USLCI will be used in this LCA study. For the waste scenario, a standard 161km of road transportation (C2) from home to MSW treatment site is assumed and zero input and output is assumed for deconstruction (C1, according to Huali, the tile can be manually removed from the floor for flooring product, hence it is omitted in this model) and waste processing (C3) of the tile.

2. Life Cycle Assessment Background Information

2.1 Functional or Declared Unit

In this study, the functional unit was defined as 1 (one) m² of flooring.

Table 4. Functional Unit Information

NAME	VALUE	UNIT
FUNCTIONAL UNIT	1	m ²
MASS	10.87	kg

2.2 System Boundary

The life cycle stages considered in this LCA study are from cradle to grave.

The following stages have been assessed:

- A1-A3: Product stage (raw material acquisition, transport to manufacturing site and manufacturing)
- A4-A5: Construction stage (transport to user site, installation)
- B2: Maintenance
- B4 Replacement .
- C1-C4: End of life stage (deconstruction, transport, waste processing and disposal)

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

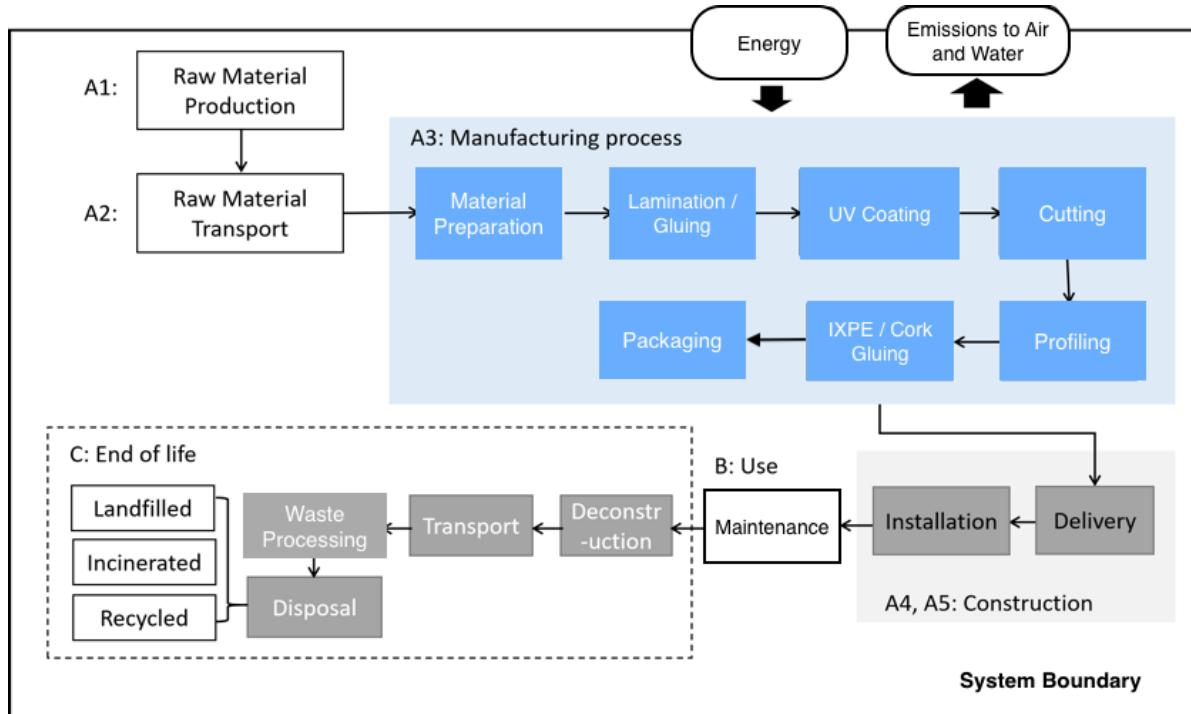


Figure 3. System Boundary of LCA Study

The LCA study traced all energy and material inputs back to the extraction of resources for each life-cycle stage of the products. In addition, the study quantified emissions from the whole system, and included various waste management scenarios.

2.3 Product for Maintenance Phase (Modules B1-B7)

For the calculations of maintenance phase, the following cleaning routine was considered:

Table 5. Cleaning and Maintenance

CLEANING PROCESS	CLEANING FREQUENCY	CONSUMPTION OF ENERGY AND RESOURCES
VACUUMING	WEEKLY	ELECTRICITY
MOPPING	WEEKLY	WATER AND DETERGENT

Table 6. Inputs in Maintenance Stage

AMOUNT	UNITS	SCENARIO
WATER	L/m ² /year	BASED ON WEEKLY MOPPING AND 10L/100M ² WATER USAGE ASSUMPTION
ELECTRICITY	kWh/m ² /year	BASED ON WEEKLY VACUUM USE AND AT POWER RATE OF 250W, 5SECOND PER SQUARE METER ASSUMPTION
DETERGENT	g/m ² /year	BASED ON WEEKLY MOPPING AND 20G/100M ² DETERGENT USAGE ASSUMPTION

2.4 Estimates and Assumptions

The main assumptions of this LCA study are as follows:

- The product description paper (1 page) included in the packaging contributes less than 0.1% to the total weight of the final product's packaging and was therefore excluded from the analysis;
- The raw materials Calcium stearate and Zinc stearate were not in the background database, so they were substituted with stearic acid from EI database;
- The distribution of energy, water and natural gas usage among the various product series is done via total production (floor area with the unit as m²) of all product produced on a yearly average;
- Transport assumptions were made where it was not possible to obtain the specific data, e.g. distance of oceanic transportation and in land transportation in USA, EU and Asia and other market. When this occurred, it was clearly stated in the report and a sensitivity analysis is conducted;
- Electricity and water consumption data were not obtained for certain processes so assumptions were made for these, e.g. maintenance stage. When this or similar situation occurred, it was clearly stated in the report.

2.5 Cut-off Criteria

The following procedures were followed for the exclusion of inputs and outputs:

- All inputs and outputs to a (unit) process were included in the calculation where data was available. Data gaps were filled by conservative assumptions with average or generic data. Any assumptions for such choices were documented;
- In case of insufficient input data or data gaps for a unit process, according to the PCR requirement, the cut-off criteria chosen is 1% of renewable and non-renewable primary energy usage and 1% of the total mass of that unit process. The total neglected input flows of the cradle to grave stage, e.g. per module A1-A3, A4-A5, B1-B5, B6-B7, and C1-C4 shall be a maximum of 5% of energy usage and mass. In this study, the neglected flow is demonstrated in the table below.

Table 7. Cut-off Flows

FLOW NAME GLUE AND DESCRIPTION PACKAGING PAPER	PROCESS STAGE PACKAGING	MASS % <<1%	TOTAL MASS % <<1%

Material and energy flows known to have the potential to cause significant emissions into air, water or soil related to the environmental indicators of this study were included in the assessment. After reviewing the Material Safety Data Sheets and relevant physical, chemical and other information of the flows listed in table above, no significant negative emission to the environment from above listed flows was identified.

Other processes that contribute to obviously less than 1% of overall mass and energy contribution were cut off, which include:

- Storage phases and sales of product
- Handling operations at the distribution center and retail outlet
- Secondary and transit packaging

- Transport from distribution warehouse to retail outlet and from retail outlet to consumer household or commercial center

2.6 Data Sources

The study used generic data from various sources, including scientific literature, public sources, and databases such as Ecoinvent, ELCD, Chinese LCI, USLCI, and others.

In the study, the key parameters for producer-specific foreground data were based on one year (Jan 2019 to Dec 2019) of averaged data from Huali. The life-cycle inventory includes data collected from a variety of publicly available sources, taking into consideration the degree to which it was technologically, temporally and geographically representative. The study utilized the Chinese-regionalized LCI database to the greatest extent possible. In the event data was missing from or not available in the LCI database, the study referred to Ecoinvent and regional databases such as USLCI, ELCD and other relevant databases. The study then conducted sensitivity analyses to validate the data and outputs using realistic parameters.

2.7 Data Quality

The data quality requirements for this study were as follows:

- Existing LCI data were, at most, 10 years old. Newly collected LCI data were current or up to 3 years old.
- The LCI data related to the geographical locations in which the processes occurred, e.g. electricity and transportation data from China, disposal in USA and Europe and etc.
- The technology represented the average technologies at the time of data collection.

2.8 Period under Review

The study used primary data collected from Jan 2019 to Dec 2019.

2.9 Allocation

This study assumed that in-plant recycling for the production of the base layer was a closed loop, meaning that the study allocated all of the environmental impacts from the recycling of the base layer, cutting, and profiling scraps and all of the environmental benefits of using recycled material to avoid waste generation during the production of the base layer to the process of production.

To be conservative, the environmental benefits of recycling and energy recovery were not included in the study for the recycling and disposal processes at the end-of-life stage.

For process-related allocations, the study distinguished between multi-input and multi-output processes.

- Multi-input processes

For data sets in this study, the allocation of the inputs from coupled processes is generally carried out via the mass. For literature data, the source is generally referred to. In this study one allocation occurs on Huali flooring production, in allocating the input and output, i.e. energy within the production site such as electricity, natural gas and etc. and some other raw material such as water, pressure oil and etc., emission such as off gas and waste water, among the various series of flooring products, allocation is done via total production (floor area with the unit as m^2) of all product produced on a yearly average.

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

- Multi-output processes

In this study, there are no other by products produced from the production line, hence there is quite little occasion that requires allocation for multi-output processes. One allocation occurs on the environmental emissions allocation, especially in the area of waste treatment. At the end of life stage, the allocation within the disposal scenario follows mass allocation.

2.10 Comparability (Optional)

No comparisons or benchmarking are included in this EPD. LCA results across EPDs can be calculated with different background databases, modeling assumptions, geographic scope and time periods, all of which are valid and acceptable according to the Product Category Rules (PCR) and ISO standards. The user of the EPD should take care when comparing EPDs from different companies. Assumptions, data sources, and assessment tools may all impact the uncertainty of the final results and make comparisons misleading.

3. Life Cycle Assessment Scenarios

According to Huali, most of flooring products are consumed in North America, Europe and Asia. Oceanic and road transportation distance for product delivery is estimated with reference to external resources. A sensitivity analysis was also conducted to test the impact level by changes of assumption of various transportation distances (sensitivity). In this study a default value for the distance is given in table below.

Table 8. Transport to the Building Site (A4)

NAME	VALUE		UNIT
Fuel type	DIESEL	HEAVY OIL	
Liters of fuel	6.48×10^{-3}	1.37×10^{-3}	L/100KM
Vehicle type	LORRY	SHIP	
Transport distance	1000	22051	KM
Capacity utilization (including empty runs, mass based)	50	100	%
Gross density of products transported	1976.4	1976.4	kg/m ³
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	0.4	0.4	-

Table 9. Installation into the Building (A5)

NAME	VALUE	UNIT
Ancillary materials (Glue) (Only for LVT (2.0) and LVT (2.5), and the value is the amount needed for one functional unit, i.e. one square meter of floor covering.)	0.05	kg
Net freshwater consumption specified by water source and fate (e.g., X m ³ river water evaporated, X m ³ city water disposed to sewer)	-	m ³
Other resources	-	kg
Electricity consumption	-	kWh

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

Other energy carriers	-	MJ
Product loss per functional unit	-	m ² /m ²
Waste materials at the construction site before waste processing, generated by product installation	-	m ² /m ²
Output materials resulting from on-site waste processing (specified by route; e.g. for recycling, energy recovery and/or disposal)	-	kg
Mass of packaging waste specified by type	Pulp: 1.67 Wood: 0.25	kg
Biogenic carbon contained in packaging	3.52	kg CO ₂
Direct emissions to ambient air, soil and water	-	kg
VOC emissions	N/A	µg/m ³

Table 10. Reference Service Life

NAME	VALUE	UNIT
RSL	10 (Commercial use)	years
Declared product properties (at the gate) and finishes, etc.	See Table 1-3	
Design application parameters (if instructed by the manufacturer), including references to the appropriate practices and application codes)	-	-
An assumed quality of work, when installed in accordance with the manufacturer's instructions	-	-
Outdoor environment	-	-
Indoor environment	18-24 °C RH: 45-60 %	18-24 °C RH: 45-60 %
Use conditions, e.g. frequency of use, mechanical exposure.	Commercial use	
Maintenance, e.g. required frequency, type and quality of replacement components	Weekly vacuuming Weekly mopping	

Table 11. Maintenance (B2)

NAME	VALUE	UNIT
Maintenance process information	Weekly vacuum and weekly mopping	-
Maintenance cycle	521 3911	Cycles/ RSL
Net freshwater consumption specified by water source and fate	5.2 city water disposed to sewer	mm ³ / m ² /year
Ancillary materials specified by type (e.g. cleaning agent)	104 (cleaning agent)	g/m ² /year
Other resources	-	kg
Energy input, specified by activity, type and amount	0.1805	kWh/m ² /RSL
Other energy carriers specified by type	-	kWh
Power output of equipment	-	kW
Waste materials from maintenance (specify materials)	-	kg
Direct emissions to ambient air, soil and water	-	kg



ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

PVC flooring products do not crack, expansion or deformation, resulting in no repair, replacement or refurbishment. Hence, for these modules there are no input and output flows and therefore no impacts.

Table 12. Repair (B3)

NAME	VALUE	UNIT
Repair process information (cite source in report)	0	-
Inspection process information (cite source in report)	0	-
Repair cycle	0	Number/ RSL
Repair cycle	0	Number/ ESL
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	0	m ³
Ancillary materials specified by type (e.g. cleaning agent)	0	kg
Energy input, specified by activity, type and amount	0	kWh
Waste materials from repair (specify materials)	0	kg
Direct emissions to ambient air, soil and water	0	kg
Further assumptions for scenario development (e.g. frequency and time period of use, number of occupants);	-	

Table 13. Replacement (B4)

NAME	VALUE	UNIT
Replacement cycle	6.5	Number/ RSL
Replacement cycle	6	Number/ ESL
Energy input, specified by activity, type and amount	0	kWh
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	0	m ³
Ancillary materials specified by type (e.g. cleaning agent)	0	kg
Replacement of worn parts, specify parts/materials	8.865	kg
Direct emissions to ambient air, soil and water	0	kg
Further assumptions for scenario development, e.g. frequency and time period of use	-	As appropriate

Table 14. Refurbishment (B5)

NAME	VALUE	UNIT
Refurbishment process description (cite source in report)	-	-
Replacement cycle	0	Number/ RSL
Replacement cycle	0	Number/ ESL
Energy input, specified by activity, type and amount	0	kWh
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	0	m ³

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

Material input for refurbishment, including ancillary materials specified by type (e.g. cleaning agent)	0	kg
Waste material(s), specified by material	0	kg
Direct emissions to ambient air, soil and water	0	kg
Further assumptions for scenario development (e.g. frequency and time period of use, number of occupants);	-	

Generally, no operational energy use or water use is applied during the use stages of PVC flooring products. Hence, for these modules there are no input and output flows and therefore no impacts.

Table 15. Operational energy use (B6) and Operational water use (B7)

NAME	VALUE	UNIT
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	0	m ³
Ancillary materials	0	kg
Energy input, specified by activity, type and amount	0	kWh
Equipment power output	0	kW
Characteristic performance (e.g. energy efficiency, variation of performance with capacity utilization)	0	Units as appropriate
Direct emissions to ambient air, soil and water	0	kg
Further assumptions for scenario development (e.g. frequency and time period of use, number of occupants);	0	As appropriate

Table 16. End-of-Life (C1-C4)

NAME	VALUE	UNIT
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation)	See description above	
Collection process (specified by type)	Collected separately Collected with mixed construction waste	kg kg
Recovery (specified by type)	Reuse Recycling Landfill Incineration Incineration with energy recovery Energy conversion efficiency rate	kg kg kg kg kg -
Disposal (specified by type)	Product or material for final deposition Removals of biogenic carbon (excluding packaging)	kg CO ₂ kg CO ₂



4. Life Cycle Assessment Results

Table 17. Description of the System Boundary Modules

Included modules in the life cycle	Product Stage	X	A1 Raw material supply
		X	A2 Transport to the manufacturer
		X	A3 Manufacturing
	Construction Process Stage	X	A4 Transport to the site
		X	A5 Assembly/Install
	Use Stage	X	B1 Use
		X	B2 Maintenance
		X	B3 Repair
		X	B4 Replacement
		X	B5 Refurbishment
		X	B6 Operational energy use
		X	B7 Operational water use
	End of Life Stage	X	C1 Deconstruction
		X	C2 Transport to waste processing
		X	C3 Waste processing for reuse, recovery and/or recycling
		X	C4 Disposal
	Benefits and loads beyond the product system boundary	MND	D Reuse, recovery and/or recycling potentials,

Note: X=Declared Module, MND=Module not Declared in this LCA study

4.1 Life Cycle Impact Assessment Results

To analyze the environmental impact of each process, a LCIA was conducted using the CML-IA baseline method and the TRACI method on the chosen representative SPC (5.5*0.5) with three kinds of underlay: cork, IXPE and EVA.

The result was allocated by stages, as shown in tables below. Note that the results are based on 10 years' usage, as the representative product will be used for commercial purposes.

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

Table 18. TRACI Results by stage – SPC (5.5*0.5) with cork as underlay over the ESL of 75 years.

Impact category (TRACI)	Unit	Production	Transport of product	Installation	Maintenance	replacements	Transport of waste	Disposal
		A1-A3	A4	A5	B2	B4	C2	C4
Ozone depletion	kg CFC-11 eq	4.78E-07	2.89E-07	2.45E-08	3.20E-07	5.14E-06	1.47E-06	2.01E-07
Global warming	kg CO ₂ eq	1.18E+01	5.16E+00	8.36E-01	4.35E+00	1.16E+02	1.75E+01	1.16E+01
Smog	kg O ₃ eq	6.96E-01	1.22E+00	4.01E-02	1.61E-01	1.27E+01	2.73E+00	1.17E-01
Acidification	kg SO ₂ eq	4.39E-02	7.83E-02	1.54E-03	1.52E+02	8.04E-01	9.53E-02	9.45E-03
Eutrophication	kg N eq	1.70E-02	4.08E-03	6.76E-03	2.56E-02	1.81E-01	8.18E-03	2.66E-01
Fossil fuel depletion	MJ surplus	3.33E+01	9.23E+00	5.36E-01	2.15E+00	2.80E+02	3.68E+01	1.75E+00

Table 19. TRACI Results by stage – SPC (5.5*0.5) with IXPE as underlay over the ESL of 75 years.

Impact category (TRACI)	Unit	Production	Transport of product	Installation	Maintenance	replacements	Transport of waste	Disposal
		A1-A3	A4	A5	B2	B4	C2	C4
Ozone depletion	kg CFC-11 eq	4.70E-07	2.85E-07	2.43E-08	1.82E-07	5.07E-06	1.46E-06	2.00E-07
Global warming	kg CO ₂ eq	1.15E+01	5.10E+00	8.31E-01	6.23E+00	1.13E+02	1.73E+01	1.14E+01
Smog	kg O ₃ eq	6.80E-01	1.21E+00	3.97E-02	2.98E-01	1.25E+01	2.70E+00	1.16E-01
Acidification	kg SO ₂ eq	4.20E-02	7.75E-02	1.52E-03	1.14E-02	7.87E-01	9.38E-02	9.38E-03
Eutrophication	kg N eq	1.62E-02	4.03E-03	6.73E-03	5.05E-02	1.75E-01	8.10E-03	2.64E-01
Fossil fuel depletion	MJ surplus	3.35E+01	9.12E+00	5.30E-01	3.98E+00	2.80E+02	3.63E+01	1.74E+00

Table 20. TRACI results by stage - SPC (5.5*0.5) with EVA as underlay

Impact category (TRACI)	Unit	Production	Transport of product	Installation	Maintenance	replacements	Transport of waste	Disposal
		A1-A3	A4	A5	B2	B4	C2	C4
Ozone depletion	kg CFC-11 eq	4.53E-07	2.87E-07	2.44E-08	3.20E-07	4.97E-06	1.46E-06	2.68E-08
Global warming	kg CO ₂ eq	1.17E+01	5.13E+00	8.34E-01	4.35E+00	1.15E+02	1.74E+01	1.53E+00
Smog	kg O ₃ eq	6.86E-01	1.22E+00	3.99E-02	1.61E-01	1.26E+01	2.72E+00	1.56E-02
Acidification	kg SO ₂ eq	4.24E-02	7.79E-02	1.53E-03	1.52E-02	7.92E-01	9.45E-02	1.26E-03
Eutrophication	kg N eq	1.57E-02	4.05E-03	6.75E-03	2.56E-02	1.72E-01	8.10E-03	3.53E-02
Fossil fuel depletion	MJ surplus	3.42E+01	9.17E+00	5.33E-01	2.15E+00	2.85E+02	3.65E+01	2.33E-01



ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

Table 21. EU Impact Assessment (CML) Results for SPC (5.5*0.5) with cork as underlay over the ESL of 75 years

Impact category (TRACI)	Unit	Production	Transport of product	Installation	Maintenance	replacements	Transport of waste	Disposal
		A1-A3	A4	A5	B2	B4	C2	C4
Abiotic depletion	kg Sb eq	1.19E-05	1.48E-06	1.20E-07	8.40E-06	8.78E-05	6.87E-06	1.16E-06
Abiotic depletion (fossil fuels)	MJ	2.51E+02	7.21E+01	3.82E+00	2.23E+01	2.12E+03	2.58E+02	1.43E+01
Global warming (GWP100a)	kg CO2 eq	1.18E+01	5.16E+00	8.36E-01	4.35E+00	1.16E+02	1.75E+01	1.16E+01
Ozone layer depletion (ODP)	kg CFC-11 eq	3.70E-07	2.18E-07	1.86E-08	2.81E-07	3.94E-06	1.10E-06	1.58E-07
Photochemical oxidation	kg C2H4 eq	2.49E-03	3.15E-03	1.93E-04	2.27E-03	3.79E-02	3.04E-03	2.32E-03
Acidification	kg SO2 eq	4.18E-02	7.63E-02	1.20E-03	1.38E-02	7.75E-01	7.65E-02	5.17E-03
Eutrophication	kg PO4--- eq	1.03E-02	7.27E-03	2.67E-03	1.25E-02	8.78E-05	1.56E-02	9.75E-02

Table 22. EU Impact Assessment (CML) Results for SPC (5.5*0.5) with IXPE as underlay over the ESL of 75 years

Impact category (TRACI)	Unit	Production	Transport of product	Installation	Maintenance	replacements	Transport of waste	Disposal
		A1-A3	A4	A5	B2	B4	C2	C4
Abiotic depletion	kg Sb eq	1.14E-05	1.46E-06	1.19E-07	8.40E-06	8.44E-05	6.80E-06	1.16E-06
Abiotic depletion (fossil fuels)	MJ	2.51E+02	7.14E+01	3.79E+00	2.23E+01	2.12E+03	2.55E+02	1.41E+01
Global warming (GWP100a)	kg CO2 eq	1.15E+01	5.10E+00	8.31E-01	4.35E+00	1.13E+02	1.73E+01	1.14E+01
Ozone layer depletion (ODP)	kg CFC-11 eq	3.64E-07	2.16E-07	1.84E-08	2.81E-07	3.89E-06	1.10E-06	1.58E-07
Photochemical oxidation	kg C2H4 eq	2.82E-03	3.12E-03	1.92E-04	2.27E-03	3.99E-02	3.00E-03	2.29E-03
Acidification	kg SO2 eq	3.99E-02	7.55E-02	1.18E-03	1.38E-02	7.58E-01	7.50E-02	5.12E-03
Eutrophication	kg PO4--- eq	9.80E-03	7.19E-03	2.66E-03	1.25E-02	8.44E-05	1.55E-02	9.68E-02

Table 23. EU Impact Assessment (CML) Results for SPC (5.5*0.5) with EVA as underlay over the ESL of 75 years

Impact category (TRACI)	Unit	Production	Transport of product	Installation	Maintenance	replacements	Transport of waste	Disposal
		A1-A3	A4	A5	B2	B4	C2	C4
Abiotic depletion	kg Sb eq	1.11E-05	1.47E-06	1.20E-07	8.40E-06	8.25E-05	6.83E-06	1.16E-06
Abiotic depletion (fossil fuels)	MJ	2.56E+02	7.17E+01	3.80E+00	2.23E+01	2.15E+03	2.57E+02	1.42E+01
Global warming (GWP100a)	kg CO2 eq	1.17E+01	5.13E+00	8.34E-01	4.35E+00	1.15E+02	1.74E+01	1.15E+01
Ozone layer depletion (ODP)	kg CFC-11 eq	3.51E-07	2.17E-07	1.85E-08	2.81E-07	3.81E-06	1.10E-06	1.58E-07
Photochemical	kg C2H4 eq	2.83E-03	3.13E-03	1.93E-04	2.27E-03	4.00E-02	3.02E-03	2.30E-03



ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

oxidation								
Acidification	kg SO ₂ eq	4.04E-02	7.59E-02	1.19E-03	1.38E-02	7.64E-01	7.58E-02	5.15E-03
Eutrophication	kg PO ₄ --- eq	9.64E-03	7.23E-03	2.67E-03	1.25E-02	8.25E-05	1.55E-02	9.75E-02

* Zero input and output were assumed for deconstruction of the tile (C1) and waste processing (C3). Therefore, values for the two modules are zero and not included in the tables.

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

4.2 Life Cycle Inventory Results

Table 24. Resource use over the ESL

PARAMETER	UNIT	SPC (5.5*0.5)_CORK	SPC (5.5*0.5)_IXPE	SPC (5.5*0.5)_EVA
RPR _E : Renewable primary resources used as energy carrier (fuel)	[MJ]	4.08E+02	1.98E+02	1.99E+02
RPR _M : Renewable primary resources with energy content used as material	[MJ]	2.23E+01	2.23E+01	2.23E+01
NRPR _E : Non-renewable primary resources used as an energy carrier (fuel)	[MJ]	9.11E+00	9.06E+00	8.94E+00
NRPR _M : Non-renewable primary resources with energy content used as material	[MJ]	4.45E+02	5.45E+02	5.45E+02
SM: Secondary materials	[kg]	0	0	0
RSF: Renewable secondary fuels	[MJ]	0	0	0
NRSF: Non-renewable secondary fuels	[MJ]	0	0	0
RE: Recovered energy	[MJ]	0	0	0
FW: Use of net fresh water resources	[m ³]	4.37E-01	4.37E-01	4.37E-01

Table 25. Output flows and waste categories over the ESL

PARAMETER	UNIT	SPC (5.5*0.5)_CORK	SPC (5.5*0.5)_IXPE	SPC (5.5*0.5)_EVA
HWD : Hazardous waste disposed	[kg]	4.94E-02	4.94E-02	4.94E-02
NHWD: Non-hazardous waste disposed	[kg]	3.01E-02	3.01E-02	3.01E-02
HLRW: High-level radioactive waste, conditioned, to final repository	[kg]	1.49E-08	1.49E-08	1.49E-08
ILLRW: Intermediate- and low-level radioactive waste, conditioned, to final repository	[kg]	9.38E-08	9.38E-08	9.38E-08
CRU: Components for re-use	[kg]	0	0	0
MR: Materials for recycling	[kg]	0	0	0
MER: Materials for energy recovery	[kg]	0	0	0
EE: Recovered energy exported from the product system	[MJ]	0	0	0

Table 26. Carbon Emissions and Removals over the ESL

PARAMETER	UNITS	SPC (5.5*0.5)_CORK	SPC (5.5*0.5)_IXPE	SPC (5.5*0.5)_EVA
BCRP	[kg CO ₂]	4.77E-01	N/A	N/A
BCEP	[kg CO ₂]	4.27E-01	N/A	N/A
BCRK	[kg CO ₂]	3.52E+00	3.52E+00	3.52E+00
BCEK	[kg CO ₂]	1.21E+00	1.21E+00	1.21E+00
BCEW	[kg CO ₂]	N/A	N/A	N/A
CCE	[kg CO ₂]	N/A	N/A	N/A
CCR	[kg CO ₂]	N/A	N/A	N/A
CWNR	[kg CO ₂]	N/A	N/A	N/A



ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

4.3 Results of other series of SPC

As for SPC with other thickness, they can be installed over most solid subfloor with minimal subfloor preparation, and the installation is completely glue free. Therefore, we can assume that for all the series of SPC floor with different thickness, the result of life cycle stages ranging from A5 (Assembly/Install) to maintenance (B2) is not affected by the thickness and can use the value from the representative product SPC (5.5*0.5). As for the result of life cycle stages from other stages including A1-A4, C2, and C4, and the result of Life cycle inventory, the scaling factors below in table 23 can be applied for calculation. (result of each series=scaling factor*value of SPC (5.5*0.5))

Table 27: All range of SPC series and relevant scaling factors

SPC	3.0*0.15	3.0*0.2	3.0*0.3	3.2*0.15	3.2*0.2	3.2*0.3	3.3*0.15
Total weight (g)	6109.8	6083.2	5991.9	6510.4	6483.7	6392.4	6710.6
Scaling factor	0.56	0.56	0.55	0.60	0.60	0.59	0.62
SPC	3.3*0.2	3.3*0.3	3.4*0.15	3.4*0.2	3.4*0.3	3.4*0.4	3.4*0.5
Total weight (g)	6683.9	6592.6	6911.1	6884.2	6792.8	6739.6	6667.4
Scaling factor	0.61	0.61	0.64	0.63	0.62	0.62	0.61
SPC	3.4*0.55	3.5*0.15	3.5*0.2	3.5*0.3	3.5*0.4	3.5*0.5	3.5*0.55
Total weight (g)	6631.3	7111	7084.3	6993.1	6939.8	6867.6	6831.5
Scaling factor	0.61	0.65	0.65	0.64	0.64	0.63	0.63
SPC	4.0*0.15	4.0*0.2	4.0*0.3	4.0*0.4	4.0*0.5	4.0*0.55	4.5*0.3
Total weight (g)	8112.1	8085.4	7994.2	7940.9	7868.7	7832.6	8995.3
Scaling factor	0.75	0.74	0.74	0.73	0.72	0.72	0.83
SPC	4.5*0.4	4.5*0.5	4.5*0.55	5.0*0.3	5.0*0.4	5.0*0.5	5.0*0.55
Total weight (g)	8942	8869.8	8833.7	9996.4	9943.2	9870.9	9834.7
Scaling factor	0.82	0.82	0.81	0.92	0.91	0.91	0.90
SPC	4.0*0.15	4.0*0.2	4.0*0.3	4.0*0.4	4.0*0.5	4.0*0.55	4.5*0.3
Total weight (g)	8112.1	8085.4	7994.2	7940.9	7868.7	7832.6	8995.3
Scaling factor	0.75	0.74	0.74	0.73	0.72	0.72	0.83
SPC	5.0*0.7	5.0*0.76	5.5*0.3	5.5*0.4	5.5*0.5	5.5*0.55	5.5*0.7
Total weight (g)	9726.3	9683.5	10997.5	10944.2	10872	10835.9	10727.4
Scaling factor	0.89	0.89	1.01	1.01	1.00	1.00	0.99
SPC	5.5*0.76	6.0*0.3	6.0*0.4	6.0*0.5	6.0*0.55	6.0*0.7	6.0*0.76
Total weight (g)	10684.6	11998.6	11945.3	11873.1	11836.95	11728.5	11685.7
Scaling factor	0.98	1.10	1.10	1.09	1.09	1.08	1.07
SPC	6.5*0.3	6.5*0.4	6.5*0.5	6.5*0.55	6.5*0.7	6.5*0.76	7.0*0.3
Total weight (g)	12999.7	12946.4	12874.2	12838.1	12729.6	12686.8	14000.8
Scaling factor	1.20	1.19	1.18	1.18	1.17	1.17	1.29
SPC	7.0*0.4	7.0*0.5	7.0*0.55	7.0*0.7	7.0*0.76	7.5*0.3	7.5*0.4
Total weight (g)	13947.5	13875.3	13839.2	13730.7	13687.9	15001.9	14948.6
Scaling factor	1.28	1.28	1.27	1.26	1.26	1.38	1.37
SPC	7.5*0.5	7.5*0.55	7.5*0.7	7.5*0.76	8.0*0.3	8.0*0.4	8.0*0.5
Total weight (g)	14876.4	14840.3	14731.8	14689	16003	15949.7	15877.5
Scaling factor	1.37	1.37	1.36	1.35	1.47	1.47	1.46
SPC	8.0*0.55	8.0*0.7	8.0*0.76	8.5*0.3	8.5*0.4	8.5*0.5	8.5*0.55
Total weight (g)	15841.4	15732.9	15690.1	17004.1	16950.8	16878.6	16842.5
Scaling factor	1.46	1.45	1.44	1.56	1.56	1.55	1.55
SPC	8.5*0.7	8.5*0.76	9.0*0.3	9.0*0.4	9.0*0.5	9.0*0.55	9.0*0.7
Total weight (g)	16734	16691.2	18005.2	17951.9	17879.7	17843.6	17735.1
Scaling factor	1.54	1.54	1.66	1.65	1.64	1.64	1.63
SPC	9.0*0.76	9.5*0.3	9.5*0.4	9.5*0.5	9.5*0.55	9.5*0.7	9.5*0.76
Total weight (g)	17692.2	19006.3	18953	18880.8	18844.7	18736.2	18693.4
Scaling factor	1.63	1.75	1.74	1.74	1.73	1.72	1.72



5. LCA Interpretation

A stage contribution analysis on various impact categories reveals that production, transportation (oceanic and road), maintenance and end of life treatment of flooring products are the main contributors to environment impacts. The process contribution analysis reveals that PVC material supply, electricity consumption, transportation, and incineration and landfill process for waste treatment contributes to most of the environmental impacts.

Sensitivity analysis shows that change in assumptions such as transportation distance, inputs during maintenance, disposal scenario and the quality of data can lead to certain fluctuation of the final LCA results, hence it is recommended to update the model to get up-to-date results, in case the assumption or process parameters will be changed in the future, or better data would be provided.

The LCA study has been carried out based on available data, information, regional and global knowledge and experience to achieve more possible accuracy, completeness and representative of the results. No known flows are deliberately excluded from this EPD.

6. Additional Environmental Information

6.1 Environment and Health During Manufacturing

No toxic chemicals and hazardous substances listed in the List of Toxic Chemicals Severely Restricted on the Import and Export in China (Circular No. 65 [2005]) and Measures for the Administration of Restricted Use of Hazardous Substances in Electrical and Electronic Products (Circular No. 32 [2016]) is found in the product.

6.2 Environment and Health During Installation

Instructions should be followed as indicated on the Safety Data Sheets and installation guidelines.

6.3 Extraordinary Effects

Fire

EN 13501-1 Fire classification of construction products and building elements: Bfl – s1

Water

In daily use, prevent water and moisture from accumulating underneath walk-off mats. Exposure to flooding for long periods may result in damage to the product.

Mechanical Destruction

Performance requires proper installation according to Huali installation guidelines.

ENVIRONMENTAL PRODUCT DECLARATION



HUALI
STONE PLASTIC COMPOSITE(SPC)

According to ISO 14025,
EN 15804 and ISO 21930:2017

7. References

UL ENVIRONMENT

UL Environment General Program Instructions v.2.7 March 2022

Part A: Life Cycle Assessment Calculation Rules and Report Requirements UL Environment (September 2018, version 3.2)

Part B: Flooring EPD Requirements. 10010-7 Version 2. UL Environment. September 2018

SUSTAINABILITY REPORTING STANDARDS

EN 15804:2012+A1:2013 Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

ISO. (2006). ISO 14044: Environmental management - Life cycle assessment - Requirements and guidelines.

ISO. (2009). ISO 14040: Environmental management - Life cycle assessment - principles and frameworks.

ISO. (2011). ISO 14025: Environmental labels and declarations - Type III environmental declarations - principles and procedures.

ISO. (2017). ISO 21930 Sustainability in building construction - Environmental declaration of building products.

8. Contact Information

8.1 EPD Owner



Taizhou Huali New Materials Co.,Ltd.

Email: bonnie.yuan@hualifloors.com

Website: www.hualifloors.com

8.2 LCA and EPD Practitioner



Ecovane Environmental Co., Ltd

Ms. Shuwen Zhang (shuwen@1mi1.cn) Website:
www.1mi1.org